

BACKYARD PLANNING GUIDE

H2X FITNESS
SWIM SPAS

Whether you are considering purchasing an H2X Swim Spa by Master Spas, or can't wait for yours to be delivered, this guide will provide you with important information about choosing a location and preparing for installation.





Once your site is ready, your swim spa can be installed in less than a day. Outdoor installation options include above ground, recessed, or partially recessed.





This desert installation offers a relaxing view of the surrounding landscape. When choosing where to install your swim spa, consider your current backyard design and landscape goals.



Swim spa planning considerations should also include access from your home, mature trees on the property, and desired privacy.





Choosing the Perfect Location

Every Master Spas swim spa is completely self-contained, making it quick and easy to install. All that's required is a solid, level surface that can handle the weight of the portable swim spa with water (around 22,000 lbs.)*, GFCI electrical hook-up completed by a licensed electrician and a garden hose to fill it up. In less than a day, you will be enjoying the warm, swirling water of your own Master Spas swim spa.

Indoor or Outdoor? Above Ground or Recessed? The Choice is Yours.

Master Spas swim spas are designed for year-round enjoyment, indoor or outdoor, and can be installed above ground, partially recessed or fully recessed. When choosing the location for your swim spa, consider how you will use your swim spa and what location will make it the most accessible and enjoyable for you and your family.

Location Planning Considerations

- How the swim spa will complement landscaping and vice versa
- The view from inside the swim spa and the view of the swim spa from inside the home
- Exposure to sunlight and shading from trees
- Privacy
- Getting to and from swim spa from the house
- Proximity to dressing rooms and bathrooms
- Storage for swim spa accessories and chemicals
- Local building codes (if applicable) and/or association requirements
- Access for routine maintenance or future repairs
- Power source

*See page 8 for details.



A built-in trap door offers access to the swim spa cabinet for maintenance

Indoor Installation

Indoor installations are best when included as part of the construction process. This allows for the swim spa to be moved in prior to completion, making access to the space much simpler. Ventilation and humidity control is also important to consider with the design contractor.

For an indoor installation into an existing space, it is best to consult with your dealer to determine the exact size of the opening needed to move the swim spa into the room, as this will vary based on the model you've selected. If enclosing your swim spa, you need to provide three feet of access around the entire perimeter. See page 7 for details.



Outdoor Installation

All of our swim spas are built to be used year-round in any climate. In fact, our environmentally friendly foam insulation makes Master Spas among the most energy-efficient swim spas in the industry.



Above Ground

The majority of our customers choose to install their swim spa fully above ground on a patio or deck. If wanting the look of a recessed installation without the expense, you may want to consider building a deck around the perimeter of the swim spa to give it a built-in look and feel.



Partially or Fully Recessed

It is possible to install your swim spa in a pit, either partially or fully recessed. In these types of installations it is important to ensure three feet of access to all sides of the swim spa. Additionally, proper drainage is essential. Because recessed installations have more extensive requirements, we recommend you discuss your plans with your dealer prior to completing the work to ensure there are no surprises down the road.

Installation Requirements

While Master Spas swim spas are relatively easy to install and have a short setup time, there are several requirements from foundation to equipment access to electrical specifications that must be met in order to ensure your new swim spa operates properly.

Foundation

When filled with water and people, a swim spa can weigh as much as several tons and it is imperative that the foundation beneath the swim spa be able to support this weight. The swim spa must be on a uniformly firm, continuous and level surface. The recommended foundation is a concrete pad with a minimum thickness of four inches with steel reinforcement bars crossed throughout the pad.

Properly supported decks are acceptable, however, we advise against patio blocks, bricks, crushed stone, sand or stone dust as these foundations can shift seasonally. It is recommended that a proper structural engineering evaluation be done before any other type of installation.

If located outside, the area around your swim spa should drain well and slope away from the swim spa. Be sure to position your swim spa so that the equipment remains above grade and is not subject to flooding.

If you've selected an inside location, or a partially or fully recessed installation, it is imperative that a floor drain system be installed in the concrete pad. This system should be designed to move any water that may collect away from your swim spa.

Equipment Bay Access


Periodic maintenance checks require entry into the equipment bay and therefore easy access to this area is important. In addition, all sides of the swim spa must be accessible for future service. In the event that service is required, your dealer will need at least three feet of clearance around the perimeter of the swim spa. Whenever possible, it is wise planning to leave access to all sides of the swim spa, as your swim spa warranty does not cover the cost of gaining access for service. This can be done by having removable panels as part of your deck or patio structure.

No Special Plumbing Required

One of the many great things about a Master Spas swim spa is that no special plumbing is required because it has a built-in heater and filtration system. Simply fill the swim spa using a garden hose with filter* and drain it with an inexpensive submersible pump.



*This disposable sediment filter attaches to your garden hose and captures dirt particles in the water BEFORE they enter into your swim spa.

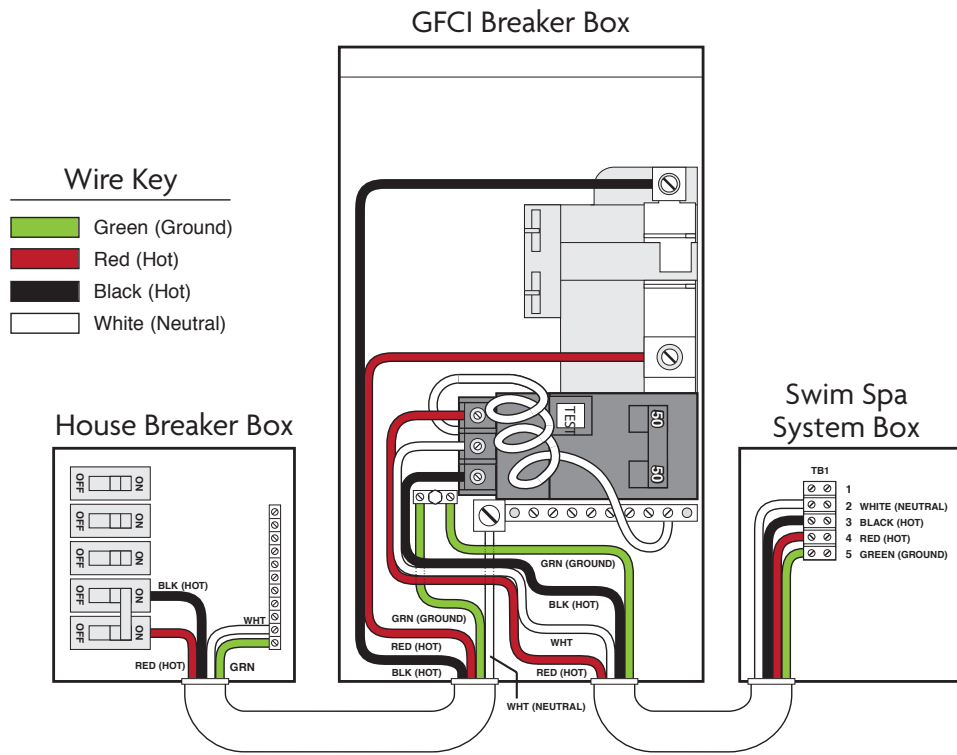

Electrical

Safety is absolutely the top priority at Master Spas. That's why every Master Spas swim spa is built and certified to stringent UL safety standards. UL is the most recognizable global independent company for safety testing. However, as with any other product that involves water, you should use common sense and follow all electrical precautions as outlined in your owner's manual.

All swim spas must be connected by a certified, licensed electrician. Depending on the swim spa chosen and the options selected, different levels of service may be needed. Your licensed electrician should follow these basic guidelines:

- Electrician should refer to the owner's manual before beginning any work. It outlines the power requirements, specifications and hook-up information for the specific model of swim spa purchased.
- All swim spas require a high-quality Ground Fault Circuit Interrupter (GFCI) circuit breaker. The GFCI is required by the National Electrician Code (NEC) for your protection.
- All electrical cables and wires must be routed through the swim spa cabinet. No wires or cables should be routed through the floor of the swim spa. Routing wires through the floor of the swim spa can result in damage to the structure or plumbing of the swim spa.
- All wire must be copper. Use of aluminum wire voids the swim spa warranty.





Ensuring a Smooth Delivery

The actual dimensions of your new swim spa will determine the amount of space that is needed for moving the swim spa from curbside to its final installation area. Check with your dealer to confirm the requirements based on the model you've selected. Walk the path that your new swim spa will travel during delivery and take measurements along the way. Be sure to measure side yard dimensions, gates or doors and vertical obstructions, such as roof overhangs and overhead cables. Any other space limiting obstacles such as trees or shrubs must be evaluated as well.

Access to your chosen installation site must be solid, level ground that has been cleared of any obstructions prior to arrival. Keep in mind that you will need to remove any doors, windows, walls, handrails or other obstructions.

When your Master Spas swim spa arrives at your home, a forklift, crane or boom truck will most likely be needed to move the swim spa into position. If it is being installed indoors, it will need to be moved into place by sliding or rolling it.

Use the illustrations below to help you determine the equipment and access needed based on the location you've selected for your swim spa. Be sure to consult your Master Spas dealer to determine the best and most cost-effective delivery method for your swim spa.

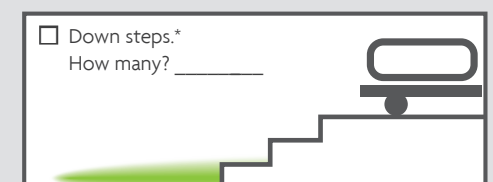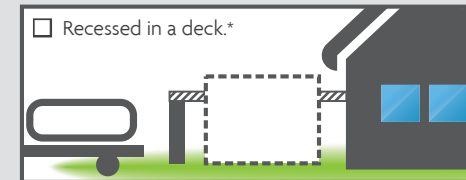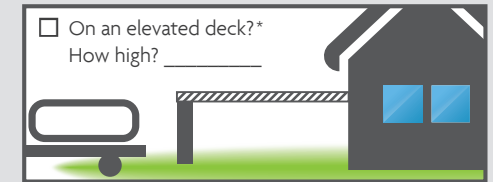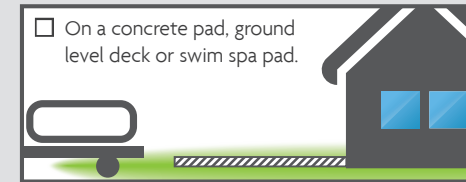

*Extra cost may apply.

Swim Spa Specifications


H2X SWIM SPAS

MODEL	DIMENSIONS	ELECTRICAL REQUIREMENTS	WATER CAPACITY	DRY WEIGHT	FULL WEIGHT
Challenger 19D	231" x 94" x 60" (587 cm x 239 cm x 153 cm)	240V 50A & 240V 50A	2,285 gal (10,388 L)	3,435 lbs. (1,558 kg)	23,790 lbs. (10,791 kg)
Challenger 18D	215" x 94" x 60" (547 cm x 239 cm x 153 cm)	240V 50A	2,080 gal (7,874 L)	2,840 lbs. (1,288 kg)	21,115 lbs. (9,578 kg)
Challenger 15D	180" x 94" x 60" (457 cm x 239 cm x 153 cm)	240V 50A	1,930 gal (7,306 L)	2,530 lbs. (1,148 kg)	19,555 lbs. (8,870 kg)
Trainer 19	231" x 94" x 51" (587 cm x 239 cm x 130 cm)	240V 50A & 240V 50A	2,055 gal (7,779 L)	2,950 lbs. (1,338 kg)	21,385 lbs. (9,700 kg)
Trainer 19D	231" x 94" x 60" (587 cm x 239 cm x 153 cm)	240V 50A & 240V 50A	2,285 gal (10,388 L)	3,215 lbs. (1,458 kg)	23,570 lbs. (10,691 kg)
Trainer 18D	215" x 94" x 60" (547 cm x 239 cm x 153 cm)	240V 50A	2,235 gal (8,460 L)	2,710 lbs. (1,229 kg)	22,275 lbs. (10,104 kg)
Trainer 15	180" x 94" x 51" (457 cm x 239 cm x 130 cm)	240V 50A	1,620 gal (6,132 L)	2,310 lbs. (1,048 kg)	16,750 lbs. (7,598 kg)
Trainer 15D	180" x 94" x 60" (457 cm x 239 cm x 153 cm)	240V 50A	1,895 gal (7,173 L)	2,575 lbs. (1,168 kg)	19,305 lbs. (8,757 kg)
Trainer 12	144" x 94" x 51" (366 cm x 239 cm x 130 cm)	240V 50A	1,245 gal (4,713 L)	1,915 lbs. (869 kg)	13,225 lbs. (5,999 kg)
Therapool 13	156" x 90" x 48" (396 cm x 229 cm x 122 cm)	240V 50A	1,270 gal (4,807 L)	1,785 lbs. (810 kg)	13,120 lbs. (5,951 kg)
Therapool D	132" x 94" x 60" (336 cm x 239 cm x 153 cm)	240V 50A	1,060 gal (4,013 L)	1,720 lbs. (780 kg)	11,860 lbs. (5,380 kg)
Therapool SE	132" x 94" x 51" (336 cm x 239 cm x 130 cm)	240V 50A	925 gal (3,502 L)	1,410 lbs. (640 kg)	10,420 lbs. (4,726 kg)



The rolling technology of the Axis Cover System makes it simple for almost anyone to handle their swim spa cover.

See the video at masterspas.com/axis

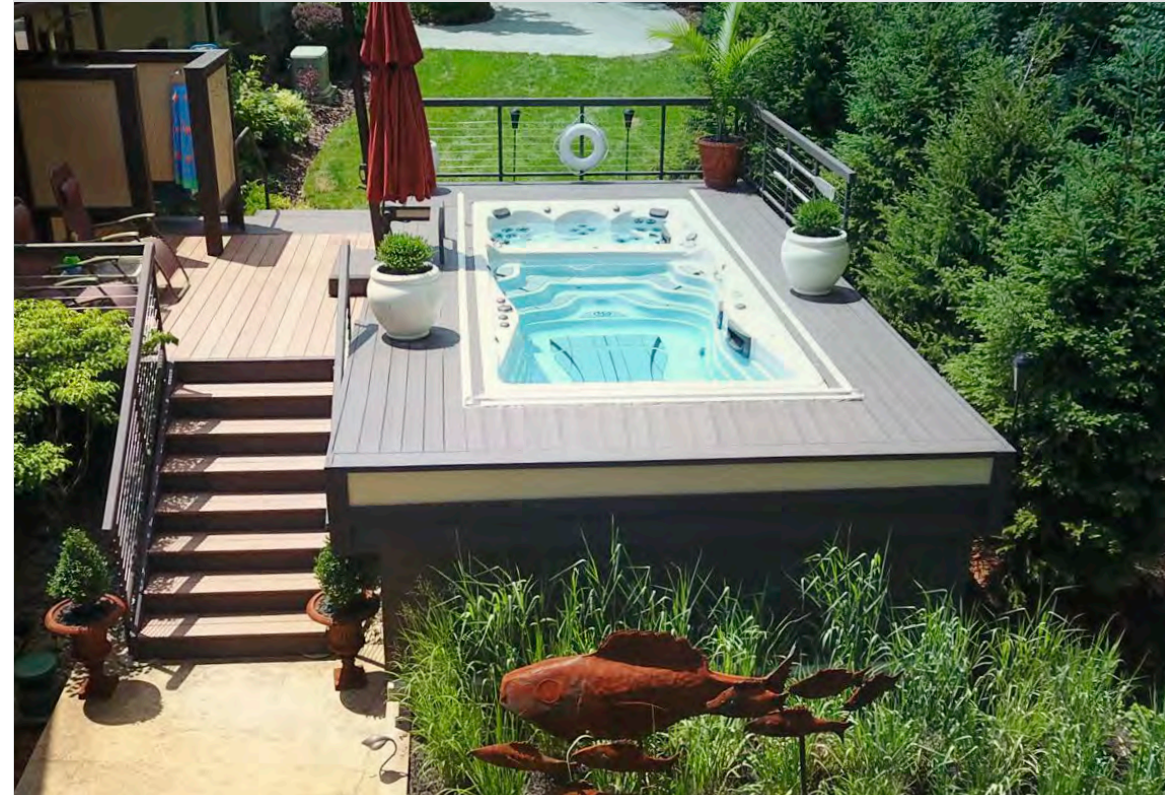

See more backyard ideas at MasterSpas.com / H2XSwimSpa.com